


# Installation instructions for MÖSCHA DUO swiveling spreader

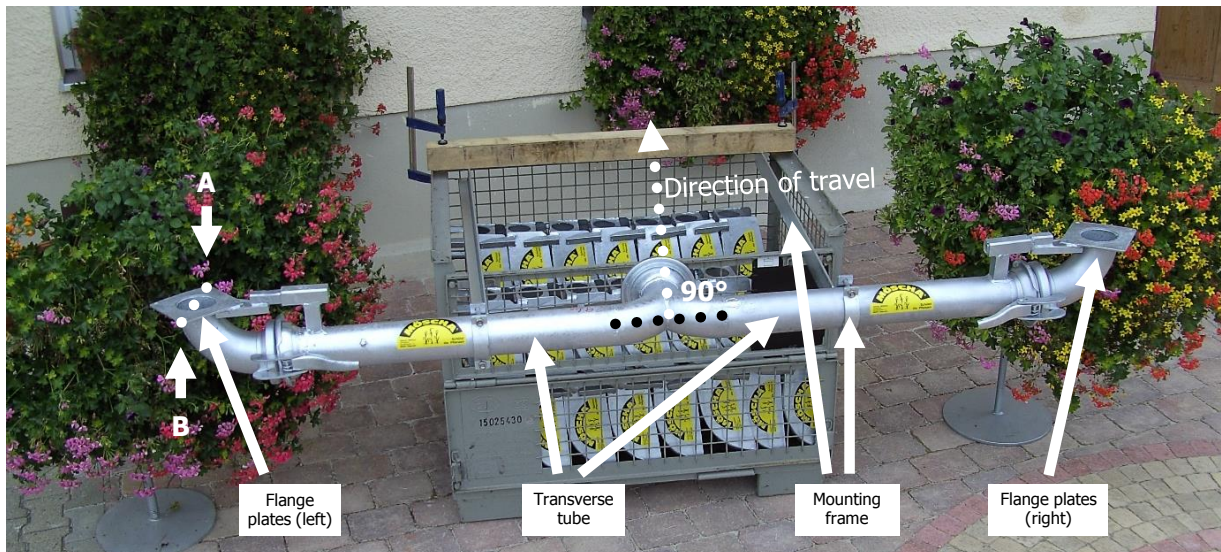

## **Important note:**

**When installing the MÖSCHA DUO swiveling spreader on the tanker, the road traffic regulations (StVO) are to be observed! It is to be ensured in particular that lights conforming to road traffic regulations are installed!**

## **Procedure for installation of the spreader:**

1. Place manure tanker on level surface.
2. Connect tube linkage to the tanker in such a way that the transverse tube is horizontal and at a right angle to the direction of travel (90°, see figure).
3. With DUO swiveling spreaders DUO 108 K and DUO 133 K, connect „right“ and „left“ curved pieces.
4. Raise or lower tube linkage so that the corner point B is approximately 9 mm lower than corner point A. (The lower B is, the wider the spreader scatters). For precise setting, place a bubble level over points A and B (see figure). Do this for each of the left and right flange plates.
5. Securely attach tube linkage to the tanker using the mounting parts; In the event of doubts, a specialist should be called in!
6. Bolt the two swiveling spreaders to the flange plates in such a way that they are turned 54° toward the outside.

**Please get in touch with us if there are any questions or ambiguities!**



**Möscha GbR**  
Michael Gutter, Helmut Mößmer u. A.  
Schalkshofen 3  
D-89294 Oberroth  
GERMANY

Phone 00 49 83 33 / 5 26  
Fax 00 49 83 33 / 93 58 44  
E-Mail info@moescha.de  
Web www.moescha.de